


**DANTE Analog Audio 2-Channel Decoder with PoE - ALT-D2AUD**

- › Supports **balanced and unbalanced audio signals**
- › Audio sample rate supports 44.1 kHz, 48 kHz and 96 kHz (24-bit)
- › Configurable Dante® device latency (supports 1, 2 or 5 ms, configurable using Dante® controller)
- › Supports AES67 RTP audio transport
- › PoE or 12V DC power supply

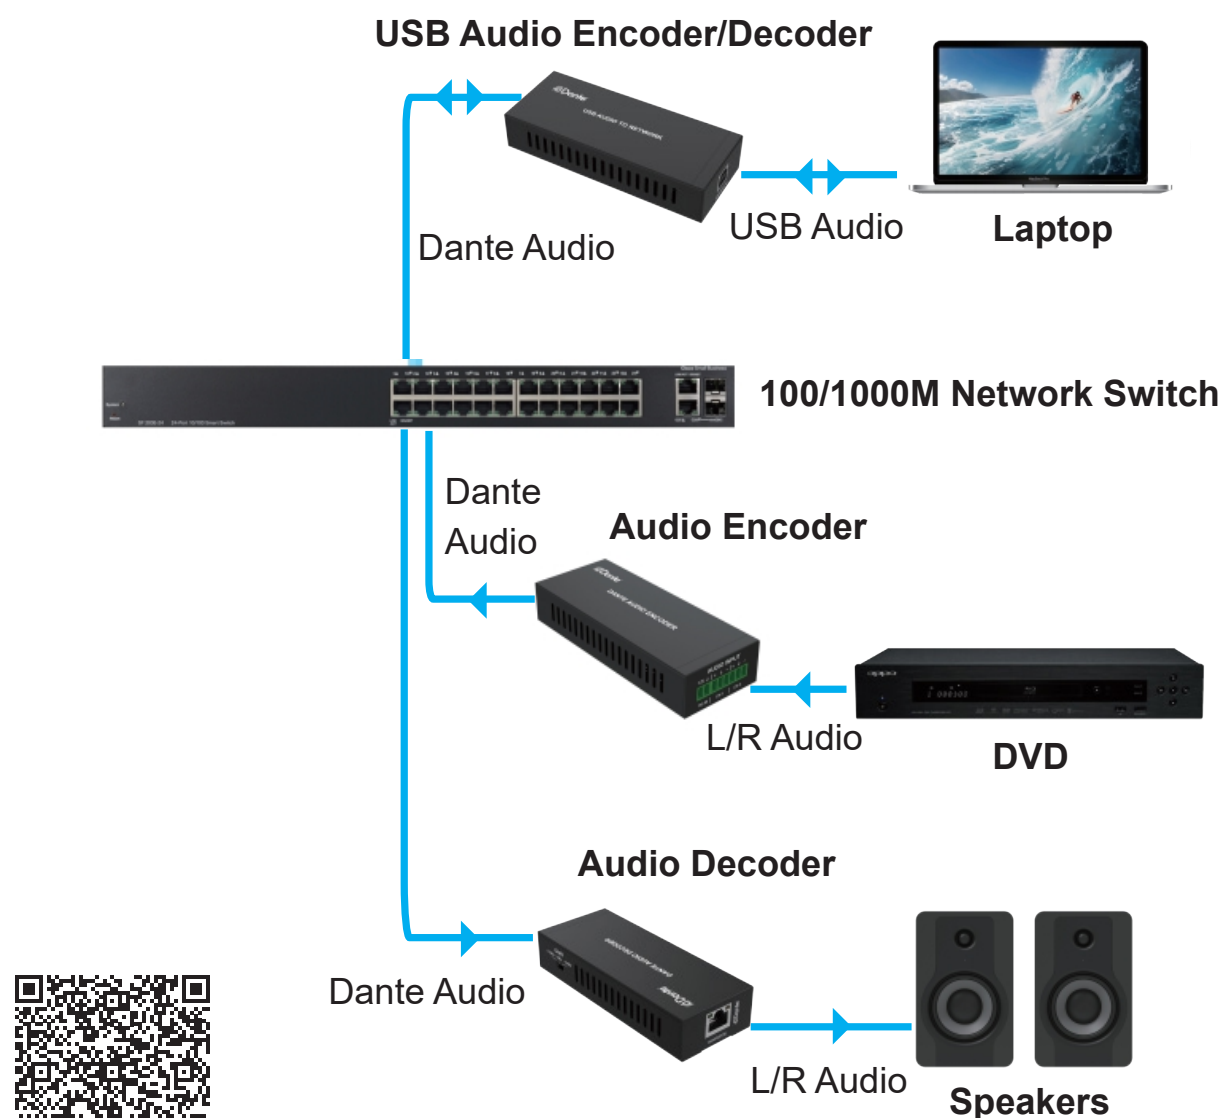

Weight (g)	186
Dimensions WxDxH (mm)	120 x 47 x 26
Consumption	1.2W

**DIAGRAM**

[Tescagroupe.com](http://Tescagroupe.com)