

## DANTE Analog Audio 2-Channel Encoder with PoE - ALT-D2AUE


- › **Supports balanced and unbalanced audio signals**
- › Audio sample rate supports 44.1 kHz, 48 kHz and 96 kHz (24-bit)
- › Configurable Dante® device latency (supports 1, 2 or 5 ms, configurable using Dante® controller)
- › Supports AES67 RTP audio transport
- › PoE or 12V DC power supply



Weight (g)	186
Dimensions WxDxH (mm)	120 x 47 x 26
Consumption	1.2W



### DIAGRAM

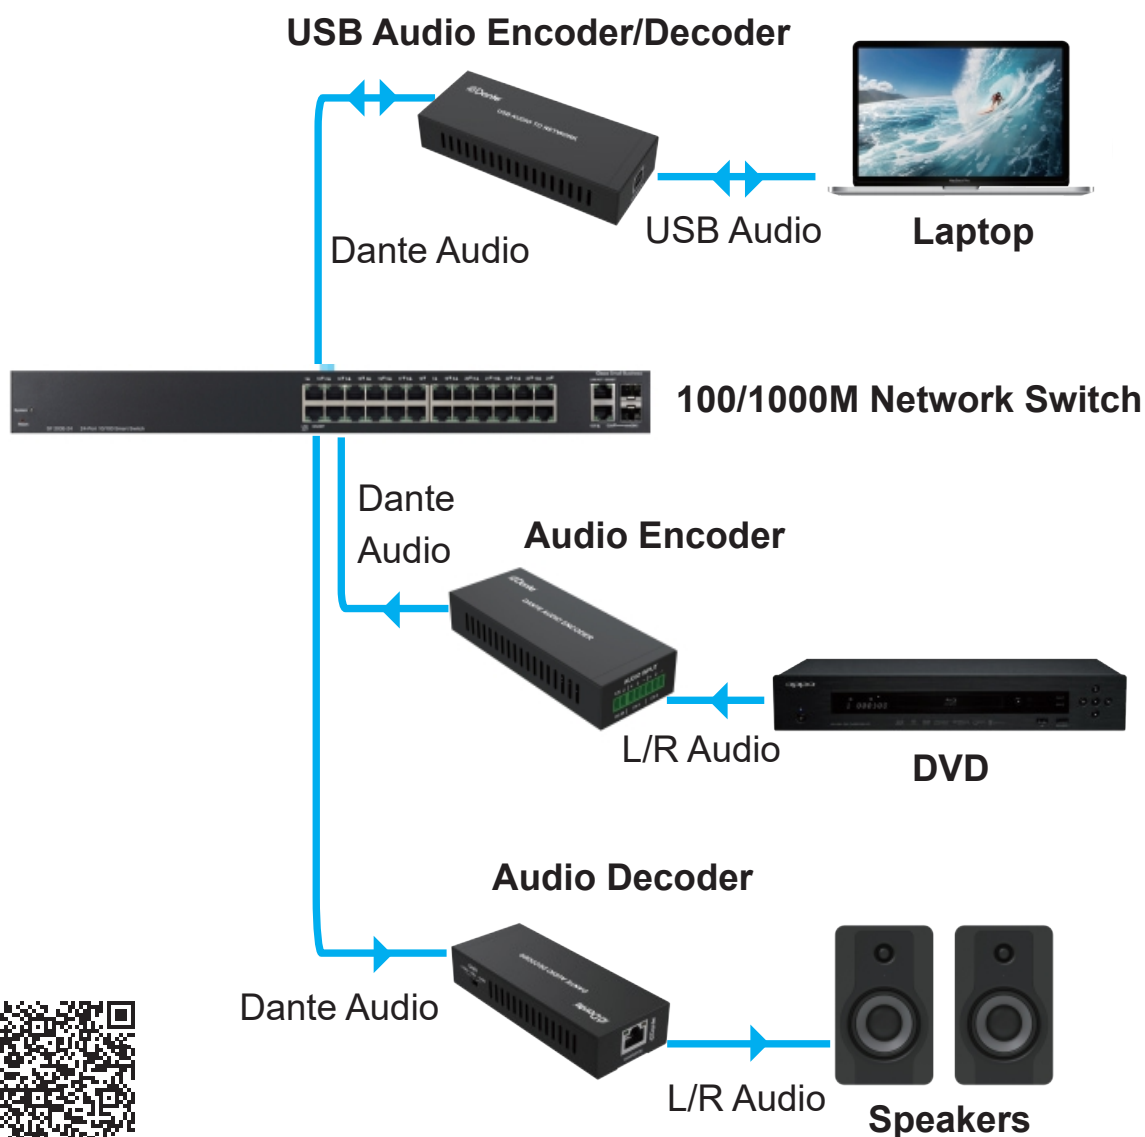

[Tesca-groupe.com](http://Tesca-groupe.com)