

Encodeur DANTE Audio USB 2 canneaux avec PoE - ALT-D2USBE


- › Compliant with USB 2.0 full-speed operation
- › Compliant with USB Audio Device Class V1.0 specification
- › Analogue sound card, supporting MIC input and SPK output
- › Audio sampling frequency supports 44.1 kHz, 48 kHz and 96 kHz (24-bit)
- › Dante® solution supports AES67 RTP audio transmission
- › Supports USB 5V power supply and PoE (IEEE802.3af Class 0) function

Weight (g)	188
Dimensions WxDxH (mm)	120 x 47 x 26
Consumption	1W



DIAGRAM

USB Audio Encoder/Decoder

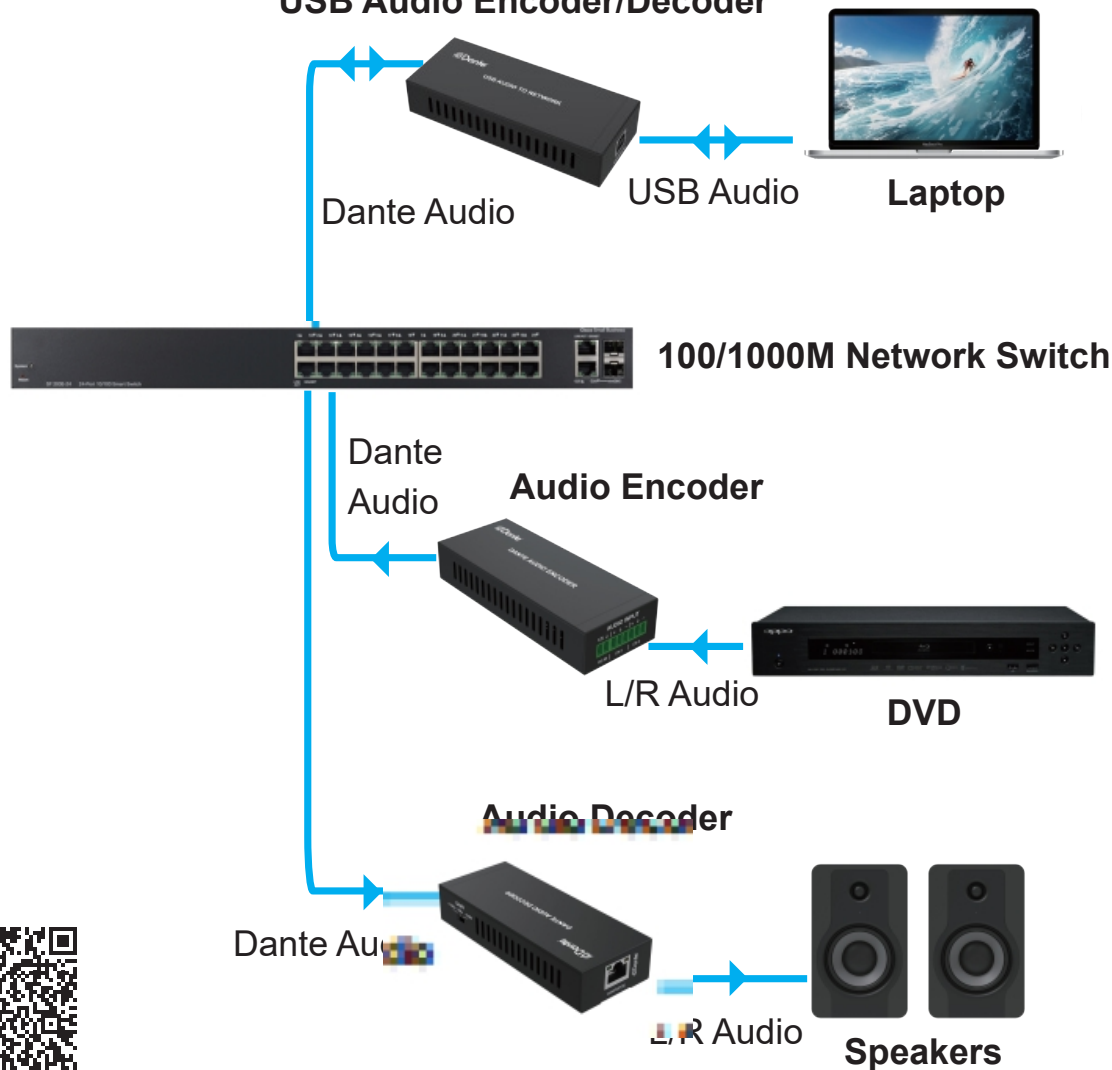

Tesca-groupe.com