





AVoIP Encoder / Decoder 4K@60Hz 4:4:4 - ALT-IP460

- 4K@60 Hz 4:4:4 over IP JPEG2000, HDR10/Dolby Vision/HLG
- HDMI 2.0b, HDCP 2.2 compatible
- Dante® AV-Audio support (optional)**
- Up to Dolby TrueHD, Dolby Atmos and DTS-HD, DTS:X
- Twisted pair and fiber
- USB 2.0 and KVM, bidirectional IR and RS-232
- Unicast, Multicast, matrix, video wall up to 9 x 9
- Integrated MJPEG sub-stream with encoder for video preview
- Standard PoE supported** (PD 802.3af device)
- Audio routing control
- ARC and EARC audio return transmission, SPDIF
- Digital I/O and relay controls, configurable 5V or 12V VCC output
- Works with ALT-IPC460DA controller

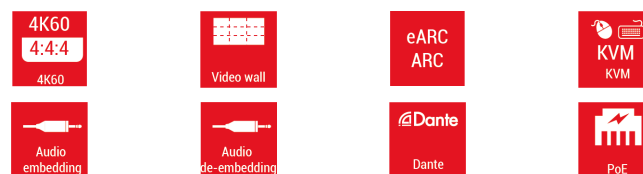

DIAGRAM

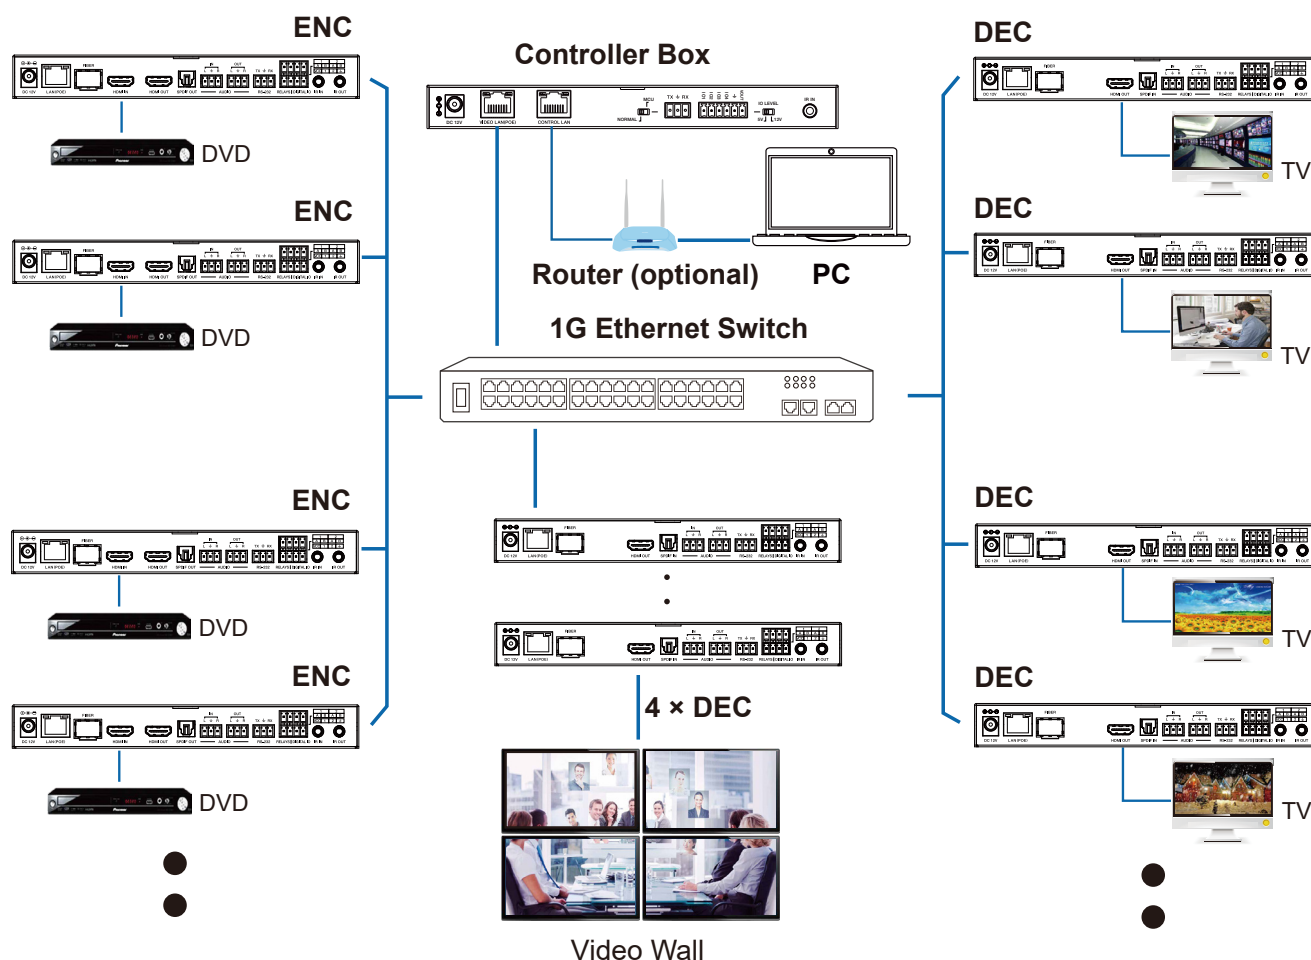

Weight (g)	Enc.: 631, Dec.: 626
Dimensions WxDxH (mm)	Enc/Dec.: 204 x 136 x 25.5
Consumption	In : AC100 - 240V 50/60Hz, Out : DC 12V/2.5A Enc: 8.52W, Dec.: 7.08W (Max.)

Tesca-groupe.com

