


AV over IP Transceiver, 10G SDVoE with FO - Zero Latency - ALT-IPT4KSDV

- › HDMI 2.0b and HDCP 2.2 compatible
- › Video resolution up to 4K@60Hz 4:4:4, 18 Gbps video bandwidth
- › Encoder or Decoder modes can be set at the touch of a button or via the API
- › Automatic detection of fiber and copper ports (adjustable priority)
- › Support for all HDMI audio formats
- › Support for signal extension, seamless switching, matrixing, video wall up to 9x9 and MultiView up to 25 windows
- › Integrated H.264 / H.265 (SS) for preview
- › Supports USB2.0 (KVM), CEC routing control
- › IR control, RS-232, TCP/IP, Web GUI
- › PoE standard (PD 802.3at device)



## DIAGRAM

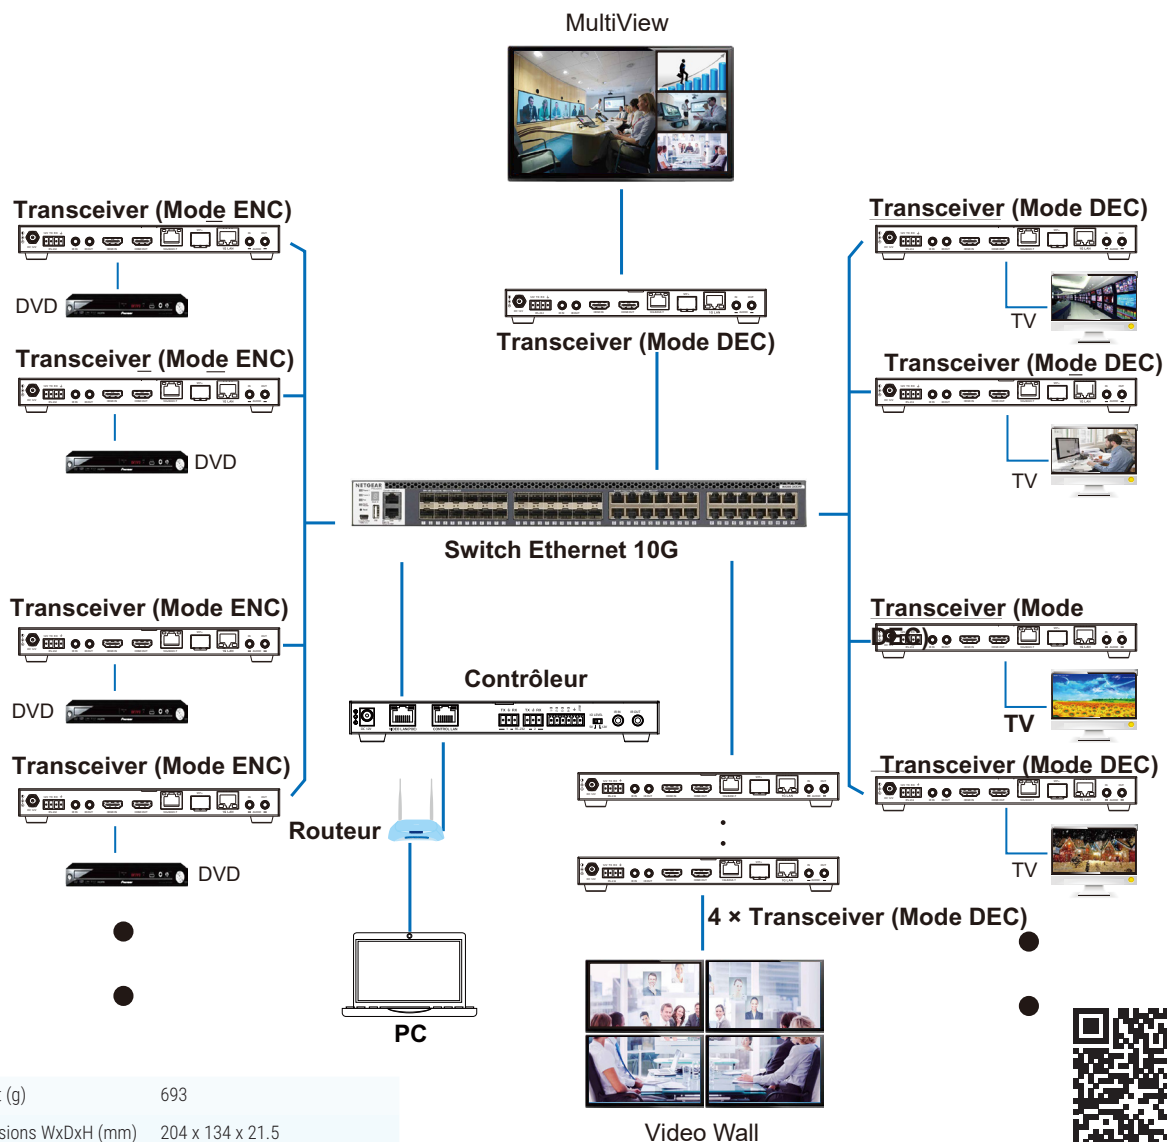

|                       |  |
|-----------------------|--|
| Weight (g)            | 693  |
| Dimensions WxDxH (mm) | 204 x 134 x 21.5                                       |
| Consumption           | In : AC100 - 240V 50/60Hz<br>Out : DC 12V/2.5A; ≈13.5W |

[Tesca-groupe.com](http://Tesca-groupe.com)
