
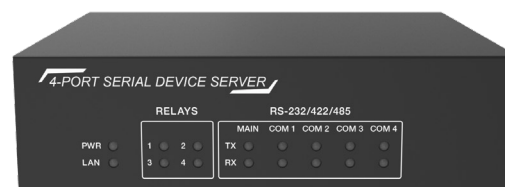


## USB

### Network Serial Port Expansion 4 port - EPSR4

- › Main serial port supports RS-232 only
- › Extended serial port 1 and extended serial port 2 support RS-232, RS-232+ hardware stream, RS-422 full duplex and RS-485 half duplex
- › Support for 4 low-voltage relay ports, normally open contacts; each group is independent and isolated, maximum load 1A 24V DC/AC
- › Integrated web server, which can configure device settings directly via the browser of various computers, tablets and mobile devices

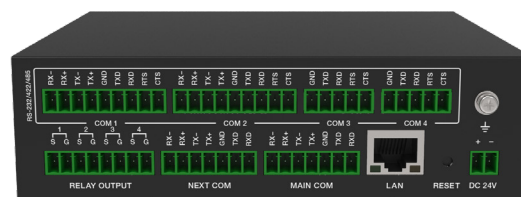


RS232

RS232

### DIAGRAM

Weight (g)	673
Dimensions WxDxH (mm)	147 x 130 x 42
Consumption	In : AC100 - 240V 50/60Hz Out : DC 24V/1A 2W

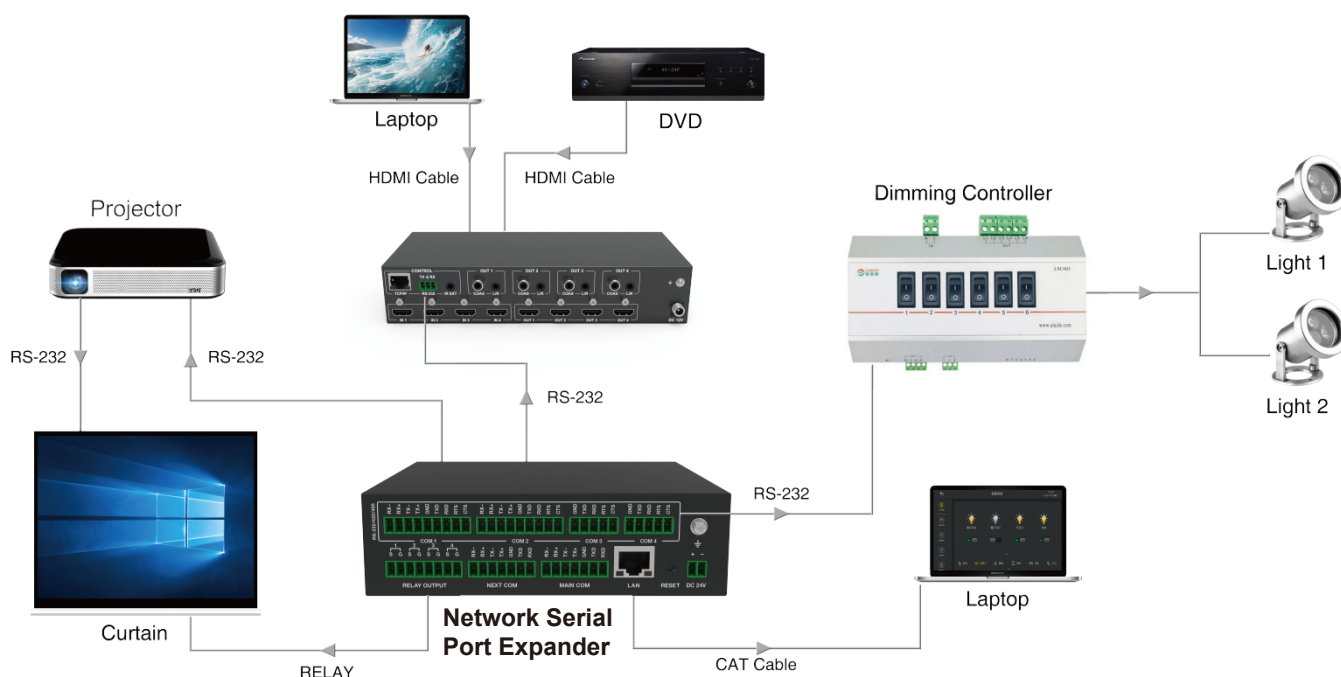

Tesca-groupe.com