


HDBASE-T

HDBT Matrix 4X4 - 4K@60Hz 4:4:4 - **MAT.HDMP44-4K V2**

- › 4 x HDMI inputs, 4 x HDMI and HDBaseT mirrored outputs
- › HDMI 2.0b, HDCP 2.2 compliant
- › Up to 4Kx2K@60 Hz with 24-bit RGB/YCBCR 4:4:4
- › HDR, HDR10, HDR10+, Dolby Vision pass-through
- › LPCM 7.1CH, Dolby TrueHD and DTS-HD Master Audio
- › Each output independently supports 4K to 1080p resolution
- › Each output supports de-embedded digital and analog audio
- › Max HDBaseT output: 1080P 150 m, 4Kx2K 120 m
- › Advanced EDID management
- › Integrated IR matrix
- › POC 24 V on all HDBaseT ports
- › Front panel button, IR control, RS-232, TCP/IP and Web GUI
- › Supplied with 4 HDBaseT receivers



DIAGRAM

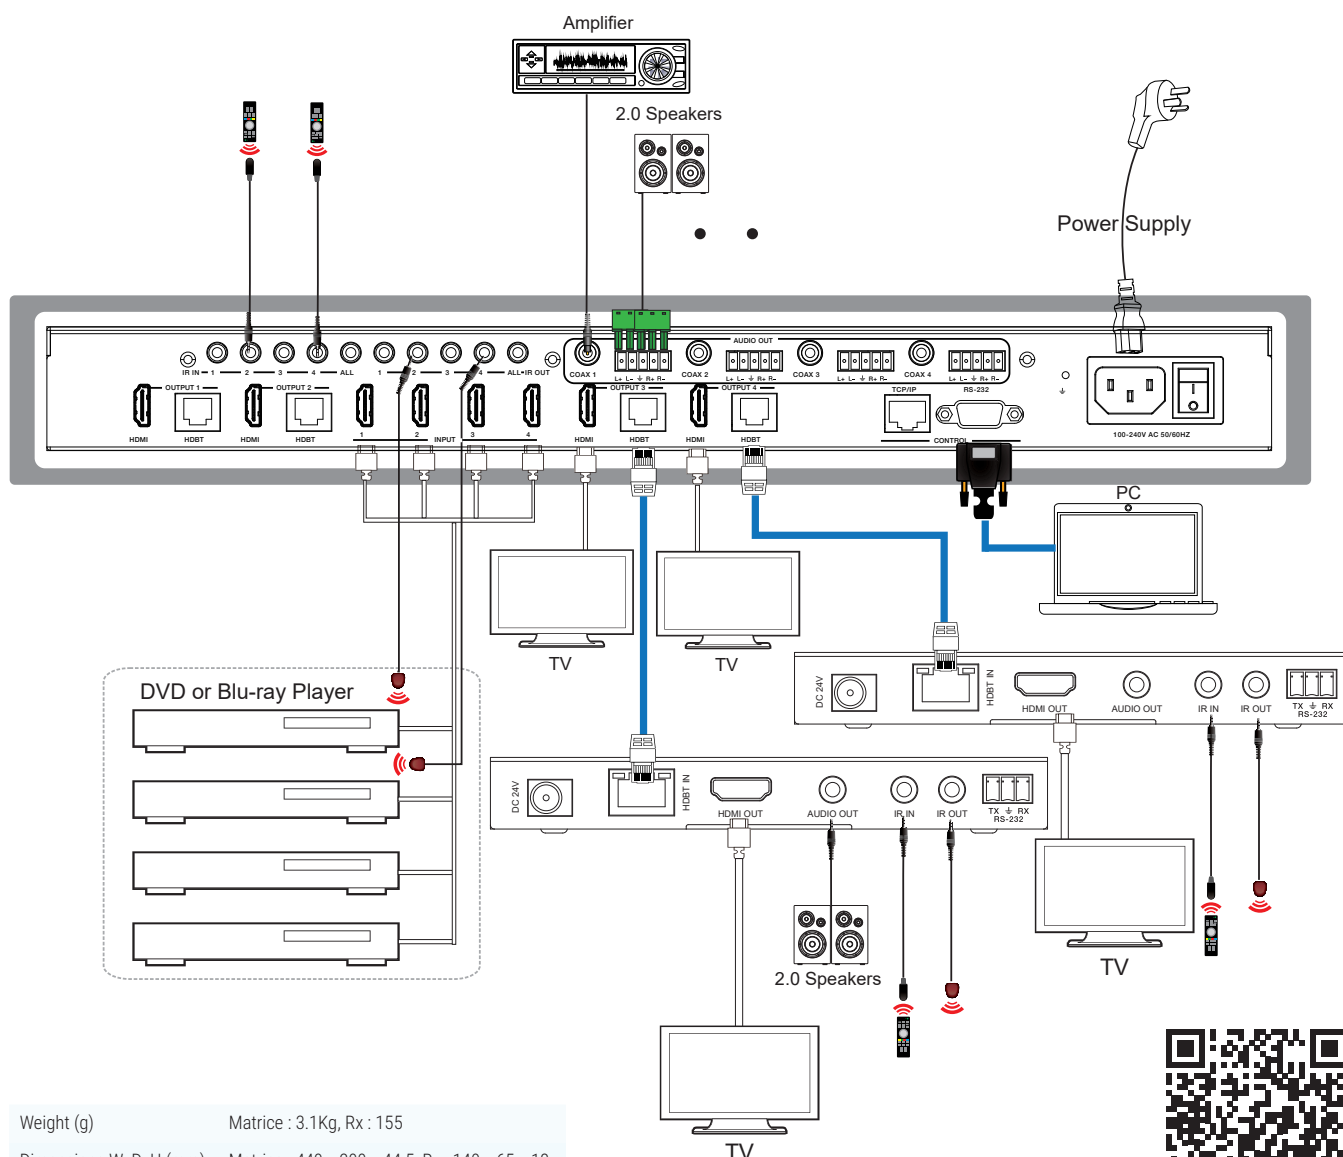

Weight (g)	Matrice : 3.1Kg, Rx : 155
Dimensions WxDxH (mm)	Matrice : 440 x 200 x 44.5, Rx : 140 x 65 x 18
Consumption	AC 100 - 240V 50/60Hz; 60W (max)

Tescra-groupe.com
