

HDBASE-T


HDBaseT Extender USB-C/HDMI 4K@60Hz 4:4:4 - TP100U-H2

- › HDMI 2.0b, HDCP 2.2 compatible
- › 4Kx2K@60 Hz uncompressed with 4:4:4 24-bit RGB/YCBCR over CATX
- › Supports LPCM 7.1CH, Dolby TrueHD and DTS-HD Master Audio
- › Up to 100 meters using CAT6A cable
- › **Two USB-C and HDMI inputs** supporting automatic or manual switching mode
- › **USB-C supports ALT-DP mode** for A/V data, USB 2.0 and power supply
- › **Charge up to 60 W**
- › EDID management
- › Analog audio de-embedding on Tx and Rx
- › TX supports USB 2.0 hub with 3 local USB client ports
- › High-speed USB 2.0 bidirectional IR and RS-232 transmission
- › POC bidirectional 24 V



DIAGRAM

Weight (g)	Tx : 484, Rx : 318
Dimensions WxDxH (mm)	Tx : 170 x 102 x 22, Rx : 144 x 78 x 23
Consumption	In : AC 100 - 240V 50/60Hz, Out : DC 24V/3.75A 94.32W (depuis le Tx, charge USB-C 60W, POC vers RX; 10.8W (depuis le Tx vers le Rx, sans charge USB-C)

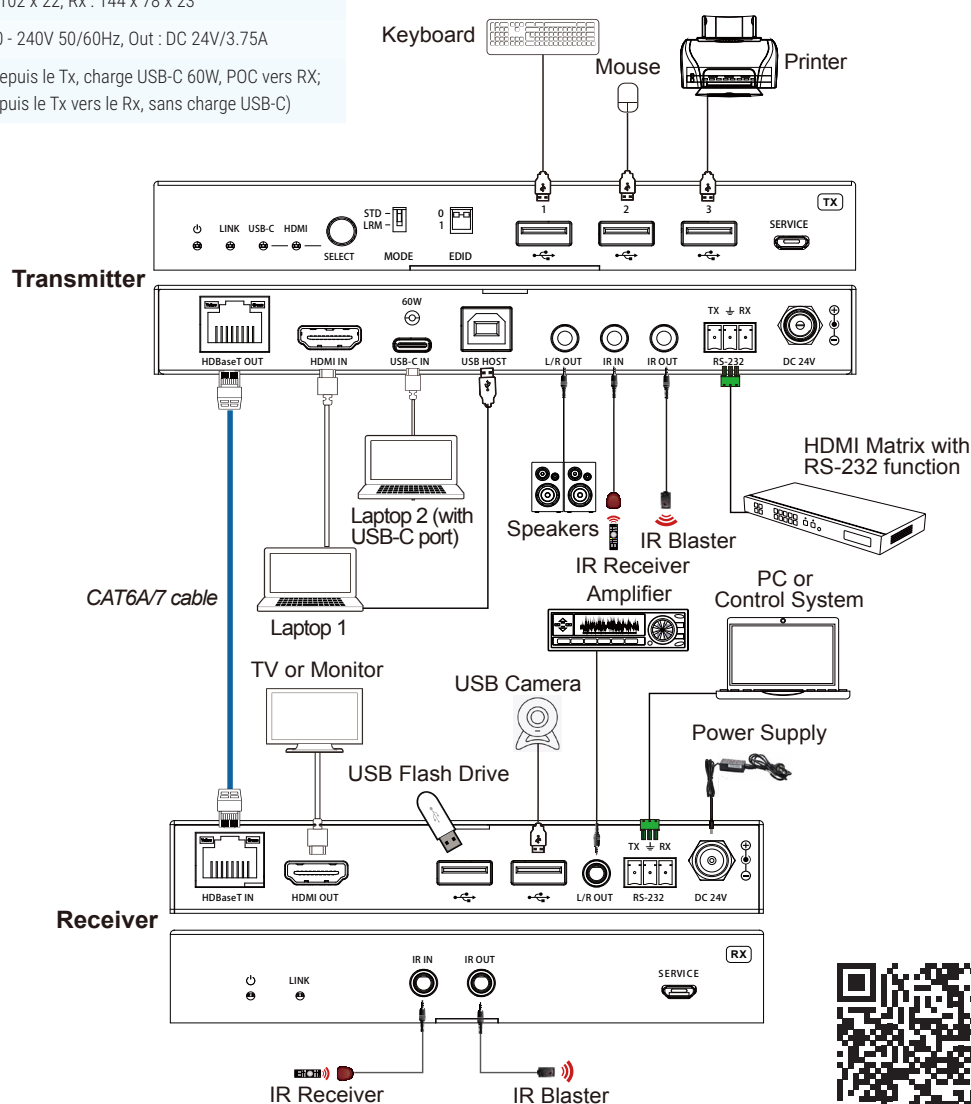

Tesca-groupe.com