


HDBASE-T

Emetteur mural HDBT HDMI 4Kx2K@60Hz 4:4:4 - TP70H2-EU

- › HDMI 2.0b and HDCP 2.2 compatible
- › Video bandwidth 18 Gbps
- › Video resolution up to 4K@60Hz 4:4:4
- › HDBaseT 1.0 VS010
- › Up to 70 m for 1080P or 40 m for 4K@60Hz via a single CatX cable on HDBT output
- › HDR, HDR10, HDR10+, Dolby Vision, HLG
- › Support for IR and bidirectional RS-232 controls
- › POC 24V or local DC 24V power supply
- › Integrated POC switch for HDBaseT projector protection
- › Supplied with HDBaseT receiver



DIAGRAM

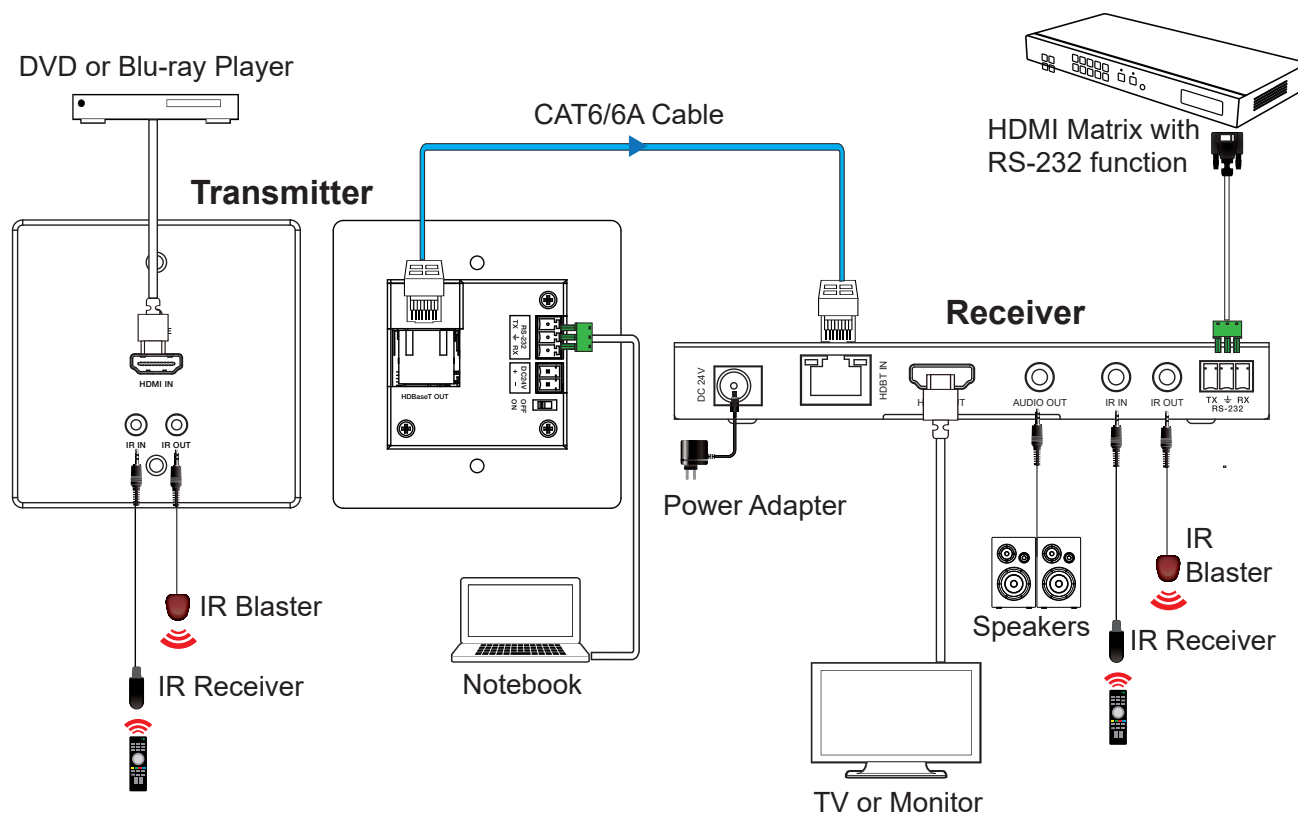

Weight (g)	Wall plate: 157g, Récepteur: 249g
Dimensions WxDxH (mm)	Wall plate: 80 x 80 x 38, Récepteur: 140 x 65 x 18
Consumption	Wall plate: 3.36W, Récepteur: 5.6W

Tesca-groupe.com

